

Surface Mount Crystal

Fits Epson MA505 footprint.

Series **CX505**



Part Numbering Example: CX505 Z - A1 B2 C3 200 - 3.579545 D18 - 3

CX505	Z	A1*	B2	C2	200	3.579545	D18	- 3
SERIES	ADDED FEATURES	OPERATING TEMP.	STABILITY	TOLERANCE	RESISTANCE	FREQUENCY	LOAD CAP.	OVERTONE
CX505	BLANK = BULK PACK Z = TAPE AND REEL	A0 = -10°C ~ +60°C A1 = -10°C ~ +70°C A2 = -40°C ~ +85°C A3 = -55°C ~ +125°C	B1 = ±100 B2 = ± 50 B3 = ± 30 B4 = ± 10	C1 = ±100 C2 = ± 50 C3 = ± 30 C4 = ± 10	SEE CHART BELOW		D16,18,20,ETC. DS = SERIES	BLANK: FUND. -3: 3rd OT -5: 5th OT -7: 7th OT -BT: BT Cut

**NOTE: The above ABC combinations cover basic specification options. We tailor our crystal specifications to meet customer requirements. Please contact our sales department if you don't see exactly what you need.*

Specifications:

Frequency Range:

3.579545 ~ 38.000 MHz	AT Cut Fundamental
25.000000 ~ 75.000 MHz	AT Cut 3rd Overtone
26.000000 ~ 42.000 MHz	BT Cut Fundamental

Operating Temperature:	-10°C ~ +70°C	Standard
	-40°C ~ +85°C	

Frequency Stability:	±100 ppm	
	± 50 ppm	Standard
	± 30 ppm	
	± 15 ppm	

Frequency Tolerance:	±100 ppm	
(at 25°C)	± 50 ppm	Standard
	± 30 ppm	
	± 10 ppm	

Load Capacitance:	Standard 18 pF or series.
	Please specify your required load.

Resistance:	Maximum resistance corresponds to frequency.
	See chart below.

Standard:	Mode: Fundamental or 3rd Overtone
	Shunt Capacitance: 7 pF Max
	Aging: ± 5 ppm/year
	Drive Level: 1.0 mW Max



Optional Features:	Tape and Reel (1K per Reel)
---------------------------	-----------------------------

Note: Not all combinations of the above tolerances, stabilities, and temperature ranges are available. Consult the factory if your requirement is not standard.

Resistance Chart: All resistances are maximum values.

EQUIVALENT SERIES RESISTANCE (ESR), MODE OF OPERATION (MODE), AND CUT					
Frequency MHz	ESR(Ω)	Mode/cut	Frequency MHz	ESR (Ω)	Mode/cut
3.579545~4.999	200 Max	Fund./AT	15.000~15.999	60 Max	Fund./AT
5.000~5.999	150 Max	Fund./AT	16.000~23.999	50 Max	Fund./AT
6.000~7.999	120 Max	Fund./AT	24.000~30.000	40 Max	Fund./AT
8.000~8.999	90 Max	Fund./AT	24.000~48.000	40 Max	Fund./BT
9.000~9.999	80 Max	Fund./AT	24.576~29.999	150 Max	3rd Overtone/AT
10.000~14.999	70 Max	Fund./AT	30.000~75.000	100 Max	3rd Overtone/AT

CX505

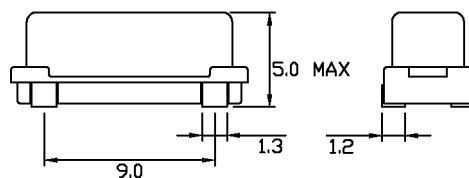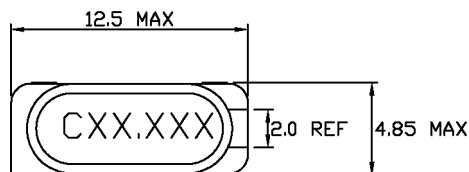

RECOMMENDED SOLDER PAD LAYOUT

